




HOME

2023
APPLIANCES

PROFESSIONAL
INNOVATION
QUALITY

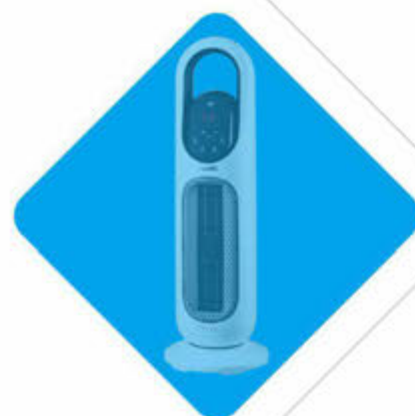

BAOERMA 宝尔玛®

Baoerma Electrical Group Co.,Ltd.

Add: No.789 Xintang Road, Fuhai Town, Cixi City, Ningbo,
Zhejiang, 315332, China

Tel: +86-574-58582078 Fax: +86-574-63563187
E-mail: salea@baoerma.com http://www.baoerma.com

The company keeps the rights to alter the product design and specification. If there is any change, advance notice won't be given then.
If there is slight difference between catalogue and actual product, please take actual product as criterion. All the data have been carefully checked.
If there is any error in printing, the company holds final explanation rights.



Profile of company

BAOERMA Electrical Group Co., Ltd. has been established in 1994. Its predecessor is Ningbo BAOERMA Electrical Co., Ltd. It mainly manufactures washing machine, electric fan, air-conditioner fan, heater series etc. The company integrates the product research, development, manufacture, part supply, international trade, market sales, service tracking into one. It endeavors to be an excellent electric appliance supplier in the world. The company is located in Fuhai Town, Cixi, Ningbo City, Zhejiang Province, China. Fuhai Town has been reputed as "One of Three Famous Manufacture Bases of Small Electric Appliance in China", "The Town of Electric Appliance", "Hometown of Flowers & Plants". It is one of the well-known leading enterprises of small electric appliance in Cixi, Ningbo, Zhejiang, China.

Over ten years, independent innovation concept is deeply implanted in the minds of "BAOERMA people". The famous Chinese trademark of "BAOERMA" electric appliance is endowed with infinite brand glamour by the excellent pioneering group, long history of professional electric appliance manufacture, advanced industrial design idea, high quality products, perfect after-sale service.

BAOERMA creates a famous brand by fine quality, opens up a big market by famous brand. ISO9001: 2008 Quality Supervision System Certification, China Compulsory Certification, CE; GS; EMC; CB International Certifications etc. symbolize the trustworthy product quality of "BAOERMA" electric appliance. The product sales networks are wide-spreading in over 20 domestic provinces and cities. BAOERMA successfully explores the international markets such as Europe, Japan, Korea, the Middle East, Southeast Asia, America etc. It furthermore witnesses that BAOERMA people will never cease their advancing steps towards their ambitious objectives.

"Developing & innovative, credit-centered" is the corporate spirits of BAOERMA Electrical.

"Quality innovation, quality first" is the quality principle of BAOERMA Electrical.

"Nothing largest, only better" is the unremitting pursuit of BAOERMA Electrical.

BAOERMA is always advancing forward!

BAOERMA Electrical will always boldly advance forward to every corner of the world!

BAOERMA 宝尔马®

Bladeless fan



DWY-S520R-D



Specification

Power(W)	35
Packing size(mm)	870x290x285
N.W.(kg)	3.0
G.W.(kg)	4.3
40'HQ(pcs)	984

Function

- BLDC MOTOR
- With remote control
- 8 hours timing
- 12 speed control
- Low noise and energy-saving
- With oscillation function
- UV lamp disinfection and sterilization
- Activated carbon filter bacteria multiple filter air



DWY-S680R-D



Specification

Power(W)	35
Packing size(mm)	1020x290x285
N.W.(kg)	3.2
G.W.(kg)	4.5
40'HQ(pcs)	824

Function

- BLDC MOTOR
- With remote control
- 8 hours timing
- 12 speed control
- Low noise and energy-saving
- With oscillation function
- UV lamp disinfection and sterilization
- Activated carbon filter bacteria multiple filter air

Bladeless fan



DWY-S780R-D



Specification

Power(W)	35
Packing size(mm)	1010x280x320
N.W.(kg)	3.3
G.W.(kg)	4.6
40'HQ(pcs)	784

Function

- BLDC MOTOR
- With remote control
- 8 hours timing
- 12 speed control
- Low noise and energy-saving
- With oscillation function
- UV lamp disinfection and sterilization
- Ultrasonic atomizing humidification
- Activated carbon filter bacteria multiple filter air



DWY-S880R-D



Specification

Power(W)	35
Packing size(mm)	1010x280x320
N.W.(kg)	3.2
G.W.(kg)	4.6
40'HQ(pcs)	816

Function

- BLDC MOTOR
- With remote control
- 8 hours timing
- 12 speed control
- Low noise and energy-saving
- With oscillation function
- UV lamp disinfection and sterilization
- Ultrasonic atomizing humidification
- Activated carbon filter bacteria multiple filter air



FL-1701R

**Specification**

Power(W)	65
Tank capacity(L)	4
Product size(mm)	240x250x540
Packing size(mm)	310x300x580
N.W.(kg)	4.4
G.W.(kg)	5.8
40'HQ(pcs)	1230

Function

- With remote control
- 0.5-7.5 hours timing
- 3 wind speed: HI,MID,LOW
- 3 wind mode: Natural,Normal,Sleeping
- 2pcs chemical ice-box accessories
- Cooling by water pump sprinkling cycling system
- Automatic left-right swing,manual adjustment for up-down wind direction



FL-1701

**Specification**

Power(W)	65
Tank capacity(L)	4
Product size(mm)	240x250x540
Packing size(mm)	310x300x580
N.W.(kg)	4.4
G.W.(kg)	5.8
40'HQ(pcs)	1230

Function

- 3 wind speed: HI,MID,LOW
- 2pcs chemical ice-box accessories
- Cooling by water pump sprinkling cycling system
- Automatic left-right swing,manual adjustment for up-down wind direction



FL-2038R

**Specification**

Power(W)	65
Tank capacity(L)	3
Product size(mm)	225x250x545
Packing size(mm)	300x285x580
N.W.(kg)	4.4
G.W.(kg)	5.8
40'HQ(pcs)	1350

Function

- With remote control
- 0.5-7.5 hours timing
- 3 wind speed: HI,MID,LOW
- 3 wind mode: Natural,Normal,Sleeping
- 2pcs chemical ice-box accessories
- Cooling by water pump sprinkling cycling system
- Automatic left-right swing,manual adjustment for up-down wind direction



FL-2038

**Specification**

Power(W)	65
Tank capacity(L)	3
Product size(mm)	225x250x545
Packing size(mm)	300x285x580
N.W.(kg)	4.4
G.W.(kg)	5.8
40'HQ(pcs)	1350

Function

- 3 wind speed: HI,MID,LOW
- 2pcs chemical ice-box accessories
- Cooling by water pump sprinkling cycling system
- Automatic left-right swing,manual adjustment for up-down wind direction

NEW



FL-2218R

**Specification**

Power(W)	65
Tank capacity(L)	6
Product size(mm)	290x280x680
Packing size(mm)	325x315x685
N.W.(kg)	5.5
G.W.(kg)	7.0
40'HQ(pcs)	1020

Function

- With remote control
- 0.5-7.5 hours timing
- 3 wind speed: HI,MID,LOW
- 3 wind mode: Natural,Normal,Sleeping
- 2pcs chemical ice-box accessories
- Cooling by water pump sprinkling cycling system
- Automatic left-right swing,manual adjustment for up-down wind direction

FL-2238R

**Specification**

Power(W)	65
Tank capacity(L)	6
Product size(mm)	290x280x680
Packing size(mm)	325x315x685
N.W.(kg)	5.5
G.W.(kg)	7.0
40'HQ(pcs)	1020

Function

- LED Display
- With remote control
- 1-8 hours timing
- 3 wind speed: HI,MID,LOW
- 3 wind mode: Natural,Normal,Sleeping
- 2pcs chemical ice-box accessories
- Cooling by water pump sprinkling cycling system
- Automatic left-right swing,manual adjustment for up-down wind direction



FL-2208R

**Specification**

Power(W)	65
Tank capacity(L)	6
Product size(mm)	290x280x680
Packing size(mm)	325x315x685
N.W.(kg)	5.5
G.W.(kg)	7.0
40'HQ(pcs)	1020

Function

- With remote control
- 0.5-7.5 hours timing
- 3 wind speed: HI,MID,LOW
- 3 wind mode: Natural,Normal,Sleeping
- 2pcs chemical ice-box accessories
- Cooling by water pump sprinkling cycling system
- Automatic left-right swing,manual adjustment for up-down wind direction

FL-2208

**Specification**

Power(W)	65
Tank capacity(L)	6
Product size(mm)	290x280x680
Packing size(mm)	325x315x685
N.W.(kg)	5.5
G.W.(kg)	7.0
40'HQ(pcs)	1020

Function

- 3 wind speed: HI,MID,LOW
- 2pcs chemical ice-box accessories
- Cooling by water pump sprinkling cycling system
- Automatic left-right swing,manual adjustment for up-down wind direction

Air Cooler



FL-1801R



Specification

Power(W)	65
Tank capacity(L)	7
Product size(mm)	300x270x740
Packing size(mm)	330x330x760
N.W.(kg)	5.7
G.W.(kg)	7.8
40'HQ(pcs)	835

Function

- With touch control and remote control
- 0.5-7.5 hours timing
- 3 wind speed: HI,MID,LOW
- 3 wind mode: Natural,Normal,Sleeping
- 2pcs chemical ice-box accessories
- Cooling by water pump sprinkling cycling system
- Automatic left-right swing,manual adjustment for up-down wind direction

FL-2028R



Specification

Power(W)	65
Tank capacity(L)	7
Product size(mm)	300x270x740
Packing size(mm)	330x330x760
N.W.(kg)	5.7
G.W.(kg)	7.8
40'HQ(pcs)	835

Function

- With touch control and remote control
- 0.5-7.5 hours timing
- 3 wind speed: HI,MID,LOW
- 3 wind mode: Natural,Normal,Sleeping
- 2pcs chemical ice-box accessories
- Cooling by water pump sprinkling cycling system
- Automatic left-right swing,manual adjustment for up-down wind direction

Air Cooler



FL-1802R



Specification

Power(W)	65
Tank capacity(L)	7
Product size(mm)	300x270x760
Packing size(mm)	330x330x780
N.W.(kg)	5.7
G.W.(kg)	7.8
40'HQ(pcs)	790

Function

- LED Display
- With touch control and remote control
- 1-8 hours timing
- 3 wind speed: HI,MID,LOW
- 3 wind mode: Natural,Normal,Sleeping
- 2pcs chemical ice-box accessories
- Cooling by water pump sprinkling cycling system
- Automatic left-right swing,manual adjustment for up-down wind direction

FL-1802



Specification

Power(W)	65
Tank capacity(L)	7
Product size(mm)	300x270x760
Packing size(mm)	330x330x780
N.W.(kg)	5.7
G.W.(kg)	7.8
40'HQ(pcs)	790

Function

- 3 wind speed: HI,MID,LOW
- 2pcs chemical ice-box accessories
- Cooling by water pump sprinkling cycling system
- Automatic left-right swing,manual adjustment for up-down wind direction

Air Cooler



FL-1602R



Specification

Power(W)	65
Tank capacity(L)	7
Product size(mm)	300x270x740
Packing size(mm)	330x330x760
N.W.(kg)	5.7
G.W.(kg)	7.8
40'HQ(pcs)	835

Function

- With remote control
- 0.5-7.5 hours timing
- 3 wind speed: HI,MID,LOW
- 4 wind mode: Natural,Normal,Sleeping,Breeze
- 2pcs chemical ice-box accessories
- Cooling by water pump sprinkling cycling system
- Automatic left-right swing,manual adjustment for up-down wind direction



FL-1602



Specification

Power(W)	65
Tank capacity(L)	7
Product size(mm)	300x270x740
Packing size(mm)	330x330x760
N.W.(kg)	5.7
G.W.(kg)	7.8
40'HQ(pcs)	835

Function

- 3 wind speed: HI,MID,LOW
- 2pcs chemical ice-box accessories
- Cooling by water pump sprinkling cycling system
- Automatic left-right swing,manual adjustment for up-down wind direction

Air Cooler



FL-1601R



Specification

Power(W)	65
Tank capacity(L)	6
Product size(mm)	280x280x690
Packing size(mm)	350x330x750
N.W.(kg)	5.5
G.W.(kg)	6.5
40'HQ(pcs)	800

Function

- With remote control
- 0.5-7.5 hours timing
- 3 wind speed: HI,MID,LOW
- 3 wind mode: Natural,Normal,Sleeping
- 2pcs chemical ice-box accessories
- Cooling by water pump sprinkling cycling system
- Automatic left-right swing,manual adjustment for up-down wind direction



FL-1601



Specification

Power(W)	65
Tank capacity(L)	6
Product size(mm)	280x280x690
Packing size(mm)	350x330x750
N.W.(kg)	5.5
G.W.(kg)	6.5
40'HQ(pcs)	800

Function

- 3 wind speed: HI,MID,LOW
- 2pcs chemical ice-box accessories
- Cooling by water pump sprinkling cycling system
- Automatic left-right swing,manual adjustment for up-down wind direction

Air Cooler



FL-15B



Specification

Power(W)	65
Tank capacity(L)	7
Product size(mm)	300x270x740
Packing size(mm)	330x330x760
N.W.(kg)	5.7
G.W.(kg)	7.8
40'HQ(pcs)	835

Function

- With remote control
- 0.5-7.5 hours timing
- 3 wind speed: HI,MID,LOW
- 3 wind mode: Natural,Normal,Sleeping
- 2pcs chemica ice-box accessories
- Cooling by water pump sprinkling cycling system
- Automatic left-right swing,manual adjustment for up-down wind direction



FL-15A



Specification

Power(W)	65
Tank capacity(L)	7
Product size(mm)	300x270x740
Packing size(mm)	330x330x760
N.W.(kg)	5.7
G.W.(kg)	7.8
40'HQ(pcs)	835

Function

- 3 wind speed: HI,MID,LOW
- 2pcs chemica ice-box accessories
- Cooling by water pump sprinkling cycling system
- Automatic left-right swing,manual adjustment for up-down wind direction

Air Cooler



FL-1606R



Specification

Power(W)	200
Tank capacity(L)	15
Product size(mm)	390x320x1000
Packing size(mm)	450x390x1055
N.W.(kg)	12.0
G.W.(kg)	14.0
40'HQ(pcs)	365

Function

- With remote control
- 1-8 hours timing
- 3 wind speed: HI,MID,LOW
- 3 wind mode: Natural,Normal,Sleeping
- 2pcs chemica ice-box accessories
- Cooling by water pump sprinkling cycling system
- With water warning
- Automatic left-right swing,manual adjustment for up-down wind direction



FL-1606



Specification

Power(W)	200
Tank capacity(L)	15
Product size(mm)	390x320x1000
Packing size(mm)	450x390x1055
N.W.(kg)	12.0
G.W.(kg)	14.0
40'HQ(pcs)	365

Function

- 2 hours timing
- 3 wind speed: HI,MID,LOW
- 2pcs chemica ice-box accessories
- Cooling by water pump sprinkling cycling system
- With water warning
- Automatic left-right swing,manual adjustment for up-down wind direction



FL-1608

**Specification**

Power(W)	200
Tank capacity(L)	15
Product size(mm)	390x320x1000
Packing size(mm)	450x390x1055
N.W.(kg)	12.0
G.W.(kg)	14.0
40'HQ(pcs)	365

Function

- 3 wind speed: HI,MID,LOW
- 2pcs chemical ice-box accessories
- Cooling by water pump sprinkling cycling system
- Automatic left-right swing,manual adjustment for up-down wind direction



FL-1902R

**Specification**

Power(W)	100
Tank capacity(L)	15
Product size(mm)	370x320x690
Packing size(mm)	415x365x760
N.W.(kg)	7.0
G.W.(kg)	9.0
40'HQ(pcs)	595

Function

- Centrifugal fan
- With remote control
- 0.5-7.5 hours timing
- 3 wind speed: HI,MID,LOW
- 4 wind mode: Natural,Normal,Sleeping,Breeze
- 2pcs chemical ice-box accessories
- Cooling by water pump sprinkling cycling system
- Automatic left-right swing,manual adjustment for up-down wind direction



FL-1702R

**Specification**

Power(W)	65
Tank capacity(L)	15
Product size(mm)	370x320x690
Packing size(mm)	415x365x760
N.W.(kg)	7.0
G.W.(kg)	9.0
40'HQ(pcs)	595

Function

- With remote control
- 0.5-7.5 hours timing
- 3 wind speed: HI,MID,LOW
- 4 wind mode: Natural,Normal,Sleeping,Breeze
- 2pcs chemical ice-box accessories
- Cooling by water pump sprinkling cycling system
- Automatic left-right swing,manual adjustment for up-down wind direction



FL-1803R

**Specification**

Power(W)	65
Tank capacity(L)	15
Product size(mm)	370x320x690
Packing size(mm)	415x365x760
N.W.(kg)	7.0
G.W.(kg)	9.0
40'HQ(pcs)	595

Function

- LED Display
- With touch control and remote control
- 1-8 hours timing
- 3 wind speed: HI,MID,LOW
- 3 wind mode: Natural,Normal,Sleeping
- 2pcs chemical ice-box accessories
- Cooling by water pump sprinkling cycling system
- Automatic left-right swing,manual adjustment for up-down wind direction



FL-1805R

**Specification**

Power(W)	65
Tank capacity(L)	15
Product size(mm)	370x320x690
Packing size(mm)	415x365x770
N.W.(kg)	7.0
G.W.(kg)	9.0
40'HQ(pcs)	595

Function

- With remote control
- 0.5-7.5 hours timing
- 3 wind speed: HI, MID, LOW
- 3 wind mode: Natural, Normal, Sleeping
- 2pcs chemical ice-box accessories
- Cooling by water pump sprinkling cycling system
- Automatic left-right swing, manual adjustment for up-down wind direction



FL-2068R

**Specification**

Power(W)	65
Tank capacity(L)	15
Product size(mm)	365x315x780
Packing size(mm)	420x370x800
N.W.(kg)	7.0
G.W.(kg)	9.0
40'HQ(pcs)	550

Function

- With remote control
- 1-8 hours timing
- 3 wind speed: HI, MID, LOW
- 3 wind mode: Natural, Normal, Sleeping
- 2pcs chemical ice-box accessories
- Cooling by water pump sprinkling cycling system
- Automatic left-right swing, manual adjustment for up-down wind direction



FL-2228R

**Specification**

Power(W)	65
Tank capacity(L)	15
Product size(mm)	365x315x780
Packing size(mm)	420x370x800
N.W.(kg)	7.0
G.W.(kg)	9.0
40'HQ(pcs)	550

Function

- LED Display
- With remote control
- 1-8 hours timing
- 3 wind speed: HI, MID, LOW
- 3 wind mode: Natural, Normal, Sleeping
- 2pcs chemical ice-box accessories
- Cooling by water pump sprinkling cycling system
- Automatic left-right swing, manual adjustment for up-down wind direction



Add the water



Top panel fill the water

10" Circulator Fan



FS18-D3



Specification

Power(W)	60
Packing size(mm)	640x310x320
N.W.(kg)	3.1
G.W.(kg)	4.3
40'HQ(pcs)	1030

Function

- 3 wind speed: HI,MID,LOW
- Automatical 85 degrees swing left-right
- Up-down by hand



FS18-D7



Specification

Power(W)	60
Packing size(mm)	640x310x320
N.W.(kg)	3.1
G.W.(kg)	4.3
40'HQ(pcs)	1030

Function

- 3 wind speed: HI,MID,LOW
- Automatical 85 degrees swing left-right
- Up-down by hand

10" Circulator Fan



FS20-Q1R



Specification

Power(W)	60
Packing size(mm)	335x335x705
N.W.(kg)	3.3
G.W.(kg)	4.5
40'HQ(pcs)	816

Function

- With remote control
- 1-7 hours timing
- 3 wind speed: HI,MID,LOW
- Max speed:7m/s
- 8 inch blade,AC motor
- Automatical 85 degrees swing left-right/up-down
- Control by touch panel



FS18-D1R



Specification

Power(W)	60
Packing size(mm)	640x310x320
N.W.(kg)	3.3
G.W.(kg)	4.5
40'HQ(pcs)	1030

Function

- With remote control
- 1-7 hours timing
- 3 wind speed: HI,MID,LOW
- Max speed:7m/s
- 8 inch blade,AC motor
- Automatical 85 degrees swing left-right/up-down
- Control by touch panel



FS20-Q3R



Specification

Power(W)	60
Packing size(mm)	335x335x705
N.W.(kg)	3.3
G.W.(kg)	4.5
40'HQ(pcs)	816

Function

- With remote control
- 1-8 hours timing
- 6 speed control
- Max speed:7m/s
- 8 inch blade,AC motor
- Automatical 85 degrees swing left-right/up-down



FS18-D3R



Specification

Power(W)	60
Packing size(mm)	640x310x320
N.W.(kg)	3.3
G.W.(kg)	4.5
40'HQ(pcs)	1030

Function

- With remote control
- 1-8 hours timing
- 6 speed control
- Max speed:7m/s
- 8 inch blade,AC motor
- Automatical 85 degrees swing left-right/up-down

10" Circulator Fan



FS20-Q5R



Specification

Power(W)	60
Packing size(mm)	335x335x705
N.W.(kg)	3.3
G.W.(kg)	4.5
40'HQ(pcs)	816

Function

- With remote control
- 1-8 hours timing
- 3 wind speed: HI,MID,LOW
- Max speed:7m/s
- 8 inch blade,AC motor
- Automatical 85 degrees swing left-right/up-down



FS20-Q6R



Specification

Power(W)	60
Packing size(mm)	335x335x705
N.W.(kg)	3.3
G.W.(kg)	4.5
40'HQ(pcs)	816

Function

- With remote control
- 1-7 hours timing
- 3 wind speed: HI,MID,LOW
- Max speed:7m/s
- 8 inch blade,AC motor
- Automatical 85 degrees swing left-right/up-down



FS18-D5R



Specification

Power(W)	60
Packing size(mm)	640x310x320
N.W.(kg)	3.3
G.W.(kg)	4.5
40'HQ(pcs)	1030

Function

- With remote control
- 1-8 hours timing
- 3 wind speed: HI,MID,LOW
- Max speed:7m/s
- 8 inch blade,AC motor
- Automatical 85 degrees swing left-right/up-down



FS18-D6R



Specification

Power(W)	60
Packing size(mm)	640x310x320
N.W.(kg)	3.3
G.W.(kg)	4.5
40'HQ(pcs)	1030

Function

- With remote control
- 1-7 hours timing
- 3 wind speed: HI,MID,LOW
- Max speed:7m/s
- 8 inch blade,AC motor
- Automatical 85 degrees swing left-right/up-down

10" BLDC Circulator Fan



FS20-Q3R-D



Specification

Power(W)	30
Packing size(mm)	335x335x705
N.W.(kg)	3.3
G.W.(kg)	4.5
40'HQ(pcs)	816

Function

- BLDC MOTOR
- With remote control
- 1-8 hours timing
- 24 speed control
- Max speed:7m/s
- 8 inch blade,DC motor
- Automatical 85 degrees swing left-right/up-down



FS20-Q5R-D



Specification

Power(W)	30
Packing size(mm)	335x335x705
N.W.(kg)	3.3
G.W.(kg)	4.5
40'HQ(pcs)	816

Function

- BLDC MOTOR
- With remote control
- 1-8 hours timing
- 24 speed control
- Max speed:7m/s
- 8 inch blade,DC motor
- Automatical 85 degrees swing left-right/up-down



FS18-D3R-D



Specification

Power(W)	30
Packing size(mm)	640x310x320
N.W.(kg)	3.3
G.W.(kg)	4.5
40'HQ(pcs)	1030

Function

- BLDC MOTOR
- With remote control
- 1-8 hours timing
- 24 speed control
- Max speed:7m/s
- 8 inch blade,DC motor
- Automatical 85 degrees swing left-right/up-down



FS18-D5R-D



Specification

Power(W)	30
Packing size(mm)	640x310x320
N.W.(kg)	3.3
G.W.(kg)	4.5
40'HQ(pcs)	1030

Function

- BLDC MOTOR
- With remote control
- 1-8 hours timing
- 24 speed control
- Max speed:7m/s
- 8 inch blade,DC motor
- Automatical 85 degrees swing left-right/up-down

10" BLDC Circulator Fan



FS20-Q7R-D



Specification

Power(W)	30
Packing size(mm)	335x335x705
N.W.(kg)	3.3
G.W.(kg)	4.5
40'HQ(pcs)	816

Function

- BLDC MOTOR
- With remote control
- 1-8 hours timing
- 24 speed control
- Max speed: 7m/s
- 8 inch blade, DC motor
- Automatical 85 degrees swing left-right/up-down



FS18-D7R-D



Specification

Power(W)	30
Packing size(mm)	640x310x320
N.W.(kg)	3.3
G.W.(kg)	4.5
40'HQ(pcs)	1030

Function

- BLDC MOTOR
- With remote control
- 1-8 hours timing
- 24 speed control
- Max speed: 7m/s
- 8 inch blade, DC motor
- Automatical 85 degrees swing left-right/up-down



FS20-Q9R-D



Specification

Power(W)	30
Packing size(mm)	335x335x705
N.W.(kg)	3.3
G.W.(kg)	4.5
40'HQ(pcs)	816

Function

- BLDC MOTOR
- With remote control
- 1-8 hours timing
- 24 speed control
- Max speed: 7m/s
- 8 inch blade, DC motor
- Automatical 85 degrees swing left-right/up-down



FS18-D9R-D



Specification

Power(W)	30
Packing size(mm)	640x310x320
N.W.(kg)	3.3
G.W.(kg)	4.5
40'HQ(pcs)	1030

Function

- BLDC MOTOR
- With remote control
- 1-8 hours timing
- 24 speed control
- Max speed: 7m/s
- 8 inch blade, DC motor
- Automatical 85 degrees swing left-right/up-down

8" Circulator Fan



FS18-T8R



Specification

Power(W)	40
Packing size(mm)	285x285x428
N.W.(kg)	2.0
G.W.(kg)	2.8
40'HQ(pcs)	1710

Function

- With remote control
- 12 hours timing
- 3 wind speed: HI, MID, LOW
- Automatical 100 degrees swing left-right, 90 degrees up-down



FS18-W1R



Specification

Power(W)	40
Packing size(mm)	685x325x290
N.W.(kg)	2.0
G.W.(kg)	3.4
40'HQ(pcs)	1026

Function

- With remote control
- 12 hours timing
- 3 wind speed: HI, MID, LOW
- Automatical 100 degrees swing left-right, 90 degrees up-down



FS18-C1



Specification

Power(W)	40
Packing size(mm)	620x255x315
N.W.(kg)	3.2
G.W.(kg)	3.6
40'HQ(pcs)	1026

Function

- 3 wind speed: HI, MID, LOW
- Automatical 80 degrees swing left-right
- Up-down by hand



FS18-C1R



Specification

Power(W)	40
Packing size(mm)	620x255x315
N.W.(kg)	3.2
G.W.(kg)	3.6
40'HQ(pcs)	1026

Function

- With remote control
- 12 hours timing
- 3 wind speed: HI, MID, LOW
- Automatical 100 degrees swing left-right, 90 degrees up-down

8" Circulator Fan



FS18-T1R



Specification

Power(W)	40
Packing size(mm)	270x255x380
Carton box size(mm)	555x532x390
N.W.(kg)	2.1
G.W.(kg)	2.8
40'HQ(pcs)	2300

Function

- With remote control
- 8 hours timing
- 3 wind speed: HI,MID,LOW
- Automatical 100 degrees swing left-right,90 degrees up-down



FS18-T1



Specification

Power(W)	40
Packing size(mm)	270x255x380
Carton box size(mm)	555x525x390
N.W.(kg)	2.1
G.W.(kg)	2.8
40'HQ(pcs)	2300

Function

- 3 wind speed: HI,MID,LOW
- Automatical 100 degrees swing left-right,90 degrees up-down by hand



FS20-Q8R(10")



Specification

Power(W)	60
Packing size(mm)	330x340x475
N.W.(kg)	1.7
G.W.(kg)	2.2
40'HQ(pcs)	1050

Function

- 3 wind speed: HI,MID,LOW
- 1-8 hours timing
- Automatical 85 degrees swing left-right/up-down



FS18-T7



Specification

Power(W)	40
Packing size(mm)	270x265x370
Carton box size(mm)	560x555x390
N.W.(kg)	1.7
G.W.(kg)	2.2
40'HQ(pcs)	2184

Function

- 3 wind speed: HI,MID,LOW
- Automatical 85 degrees swing left-right
- Up-down by hand

8" Circulator Fan



FS18-T2



Specification

Power(W)	40
Packing size(mm)	240x235x350
Carton box size(mm)	500x490x365
N.W.(kg)	1.7
G.W.(kg)	2.2
40'HQ(pcs)	3068

Function

- 3 wind speed: HI,MID,LOW
- Automatical 100 degrees swing left-right,65 degrees up-down by hand



FS18-T3



Specification

Power(W)	40
Packing size(mm)	240x235x395
Carton box size(mm)	500x485x415
N.W.(kg)	1.8
G.W.(kg)	2.4
40'HQ(pcs)	2576

Function

- 3 wind speed: HI,MID,LOW
- Automatical 100 degrees swing left-right
- 65 degrees up-down by hand



FS18-T15



Specification

Power(W)	40
Packing size(mm)	280x210x325
Carton box size(mm)	580x440x345
N.W.(kg)	1.7
G.W.(kg)	2.2
40'HQ(pcs)	3024

Function

- 3 wind speed: HI,MID,LOW
- 90 degrees up-down by hand
- No swing



FS18-T15-B



Specification

Power(W)	40
Packing size(mm)	280x210x325
Carton box size(mm)	580x440x345
N.W.(kg)	1.7
G.W.(kg)	2.2
40'HQ(pcs)	3024

Function

- 3 wind speed: HI,MID,LOW
- Automatical 100 degrees swing left-right,90 degrees up-down by hand

2 IN 1 Fan



FD30-B5



Specification

Power(W)	50
Packing size(mm)	365x255x365
N.W.(kg)	2.6
G.W.(kg)	3.4
40'HQ(pcs)	2016

Function

- 3 wind speed: HI,MID,LOW
- Automatical 70 degrees swing left-right,90 degrees up-down by hand



FD30-B5R-D



Specification

Power(W)	30
Packing size(mm)	365x255x365
N.W.(kg)	2.6
G.W.(kg)	3.4
40'HQ(pcs)	2016

Function

- With remote control
- 8 hours timing
- 12 speed control
- Swing left and right

BLDC fan



FD35-B16R



Specification

Power(W)	30
Packing size(mm)	650x200x420
N.W.(kg)	3.4
G.W.(kg)	4.3
40'HQ(pcs)	1188

Function

- BLDC MOTOR
- With remote control
- 8 hours timing
- 24 speed control
- Swing left and right



FD35-B19R



Specification

Power(W)	30
Packing size(mm)	750x190x415
N.W.(kg)	3.4
G.W.(kg)	4.3
40'HQ(pcs)	1152

Function

- BLDC MOTOR
- With remote control
- 8 hours timing
- 24 speed control
- Swing left and right

14" Stand fan(350mm)



FD35-B7R



Specification

Power(W)	55
Packing size(mm)	580x200x410
N.W.(kg)	3.4
G.W.(kg)	4.3
40'HQ(pcs)	1425

Function

- With remote control
- 0.5-7.5 hours timing
- 4 speed control
- 5 blade
- Swing left and right



FD35-B8R



Specification

Power(W)	55
Packing size(mm)	580x200x410
N.W.(kg)	3.4
G.W.(kg)	4.3
40'HQ(pcs)	1425

Function

- With remote control
- 0.5-7.5 hours timing
- 4 speed control
- 5 blade
- Swing left and right



FD35-B10R



Specification

Power(W)	55
Packing size(mm)	580x200x410
N.W.(kg)	3.4
G.W.(kg)	4.3
40'HQ(pcs)	1425

Function

- With remote control
- 0.5-7.5 hours timing
- 4 speed control
- 5 blade
- Swing left and right

14" Stand fan(350mm)



FD35-B9



Specification

Power(W)	55
Packing size(mm)	580x200x410
N.W.(kg)	3.4
G.W.(kg)	4.3
40'HQ(pcs)	1425

Function

- 3 hours timing
- 4 speed control
- 5 blade
- Swing left and right



FD35-B15



Specification

Power(W)	55
Packing size(mm)	580x200x410
N.W.(kg)	3.4
G.W.(kg)	4.3
40'HQ(pcs)	1425

Function

- 3 hours timing
- 4 speed control
- 5 blade
- Swing left and right



FD35-B17R



Specification

Power(W)	55
Packing size(mm)	615x175x410
N.W.(kg)	3.4
G.W.(kg)	4.3
40'HQ(pcs)	1500

Function

- With remote control
- 0.5-7.5 hours timing
- 4 speed control
- 5 blade
- Swing left and right



FD35-B38R

**Specification**

Power(W)	55
Packing size(mm)	615x175x410
N.W.(kg)	3.2
G.W.(kg)	3.9
40'HQ(pcs)	1500

Function

- With remote control
- 0.5-7.5 hours timing
- 3 speed control
- 3 blade
- Swing left and right



FD35-B38

**Specification**

Power(W)	55
Packing size(mm)	615x175x410
N.W.(kg)	3.2
G.W.(kg)	3.9
40'HQ(pcs)	1500

Function

- 2 hours timing
- 3 speed control
- 5 blade
- Swing left and right



FD35-B41

**Specification**

Power(W)	55
Packing size(mm)	580x200x410
N.W.(kg)	3.4
G.W.(kg)	4.3
40'HQ(pcs)	1425

Function

- 3 hours timing
- 3 speed control
- 5 blade
- Swing left and right



FD35-B40

**Specification**

Power(W)	55
Packing size(mm)	580x200x410
N.W.(kg)	3.4
G.W.(kg)	4.3
40'HQ(pcs)	1425

Function

- 3 hours timing
- 3 speed control
- 5 blade
- Swing left and right



FD35-B39

**Specification**

Power(W)	55
Packing size(mm)	580x200x410
N.W.(kg)	3.4
G.W.(kg)	4.3
40'HQ(pcs)	1425

Function

- 3 hours timing
- 3 speed control
- 5 blade
- Swing left and right



FD35-B37

**Specification**

Power(W)	55
Packing size(mm)	580x200x410
N.W.(kg)	3.4
G.W.(kg)	4.3
40'HQ(pcs)	1425

Function

- 3 hours timing
- 3 speed control
- 5 blade
- Swing left and right



FD35-B35

**Specification**

Power(W)	55
Packing size(mm)	595x200x410
N.W.(kg)	3.5
G.W.(kg)	4.4
40'HQ(pcs)	1380

Function

- 3 hours timing
- 3 speed control
- 5 blade
- Swing left and right



FD35-B33

**Specification**

Power(W)	55
Packing size(mm)	580x200x410
N.W.(kg)	3.4
G.W.(kg)	4.3
40'HQ(pcs)	1425

Function

- 3 hours timing
- 3 speed control
- 5 blade
- Swing left and right



FD35-B32

**Specification**

Power(W)	55
Packing size(mm)	580x200x410
N.W.(kg)	3.4
G.W.(kg)	4.3
40'HQ(pcs)	1425

Function

- 3 hours timing
- 3 speed control
- 5 blade
- Swing left and right



FD35-B31

**Specification**

Power(W)	55
Packing size(mm)	615x175x410
N.W.(kg)	3.2
G.W.(kg)	3.9
40'HQ(pcs)	1500

Function

- 3 hours timing
- 3 speed control
- 3 blade
- Swing left and right



FD35-B31-A

**Specification**

Power(W)	55
Packing size(mm)	615x175x410
N.W.(kg)	3.2
G.W.(kg)	3.9
40'HQ(pcs)	1500

Function

- 2 hours timing
- 3 speed control
- 3 blade
- Swing left and right



FD35-B30

**Specification**

Power(W)	55
Packing size(mm)	615x175x410
N.W.(kg)	3.2
G.W.(kg)	3.9
40'HQ(pcs)	1500

Function

- 3 hours timing
- 3 speed control
- 3 blade
- Swing left and right

14" Stand fan(350mm)



FD35-B30-A



Specification

Power(W)	55
Packing size(mm)	615x175x410
N.W.(kg)	3.2
G.W.(kg)	3.9
40'HQ(pcs)	1500

Function

- 2 hours timing
- 3 speed control
- 3 blade
- Swing left and right



FD35-B29



Specification

Power(W)	55
Packing size(mm)	615x175x410
N.W.(kg)	3.2
G.W.(kg)	3.9
40'HQ(pcs)	1500

Function

- 3 hours timing
- 3 speed control
- 5 blade
- Swing left and right



FD35-B27



Specification

Power(W)	55
Packing size(mm)	560x250x410
N.W.(kg)	3.0
G.W.(kg)	3.7
40'HQ(pcs)	1180

Function

- 3 hours timing
- 3 speed control
- 3 blade
- Swing left and right

16" Stand fan(400mm)



FD40-A1R



Specification

Power(W)	60
Packing size(mm)	495x215x450
N.W.(kg)	4.6
G.W.(kg)	5.7
40'HQ(pcs)	1375

Function

- With remote control
- 1-7 hours timing
- 4 speed control
- 5 blade
- Swing left and right



FD40-A41R



Specification

Power(W)	60
Packing size(mm)	540x215x450
N.W.(kg)	5.9
G.W.(kg)	7.0
40'HQ(pcs)	1280

Function

- With remote control
- 0.5-7.5 hours timing
- 4 speed control
- 5 blade
- Swing left and right



FD40-A40R



Specification

Power(W)	60
Packing size(mm)	540x215x450
N.W.(kg)	5.7
G.W.(kg)	6.5
40'HQ(pcs)	1280

Function

- With remote control
- 0.5-7.5 hours timing
- 3 speed control
- 5 blade
- Swing left and right

16" Stand fan(400mm)



FD40-A39R



Specification

Power(W)	60
Packing size(mm)	540x215x450
N.W.(kg)	5.7
G.W.(kg)	6.5
40'HQ(pcs)	1280

Function

- With remote control
- 0.5-7.5 hours timing
- 3 speed control
- 5 blade
- Swing left and right



FD40-A38R



Specification

Power(W)	60
Packing size(mm)	540x215x450
N.W.(kg)	5.7
G.W.(kg)	6.5
40'HQ(pcs)	1280

Function

- With remote control
- 0.5-7.5 hours timing
- 3 speed control
- 5 blade
- Swing left and right



FD40-A36R



Specification

Power(W)	60
Packing size(mm)	495x215x450
N.W.(kg)	5.2
G.W.(kg)	6.0
40'HQ(pcs)	1375

Function

- With remote control
- 0.5-7.5 hours timing
- 3 speed control
- 5 blade
- Swing left and right

16" Stand fan(400mm)



FD40-A34ER



Specification

Power(W)	60
Packing size(mm)	540x215x450
N.W.(kg)	5.7
G.W.(kg)	6.5
40'HQ(pcs)	1280

Function

- With remote control
- 0.5-7.5 hours timing
- 3 speed control
- 5 blade
- Swing left and right



FD40-A34R



Specification

Power(W)	60
Packing size(mm)	540x215x450
N.W.(kg)	5.7
G.W.(kg)	6.5
40'HQ(pcs)	1280

Function

- With remote control
- 0.5-9.5 hours timing
- 3 speed control
- 5 blade
- Swing left and right



FD40-A33R



Specification

Power(W)	60
Packing size(mm)	495x215x450
N.W.(kg)	5.3
G.W.(kg)	6.1
40'HQ(pcs)	1375

Function

- With remote control
- 0.5-7.5 hours timing
- 3 speed control
- 5 blade
- Swing left and right

16" Stand fan(400mm)



FD40-A32R



Specification

Power(W)	60
Packing size(mm)	540x215x450
N.W.(kg)	5.7
G.W.(kg)	6.5
40'HQ(pcs)	1280

Function

- With remote control
- 0.5-7.5 hours timing
- 3 speed control
- 5 blade
- Swing left and right



FD40-A1



Specification

Power(W)	60
Packing size(mm)	495x215x450
N.W.(kg)	4.4
G.W.(kg)	5.5
40'HQ(pcs)	1375

Function

- 1 hours timing
- 3 speed control
- 5 blade
- Swing left and right



FD40-A2



Specification

Power(W)	60
Packing size(mm)	495x215x450
N.W.(kg)	4.4
G.W.(kg)	5.5
40'HQ(pcs)	1375

Function

- 1 hours timing
- 3 speed control
- 5 blade
- Swing left and right

16" Stand fan(400mm)



FD40-A41



Specification

Power(W)	60
Packing size(mm)	540x215x450
N.W.(kg)	5.6
G.W.(kg)	6.7
40'HQ(pcs)	1280

Function

- 1 hours timing
- 3 speed control
- 5 blade
- Swing left and right



FD40-A40



Specification

Power(W)	60
Packing size(mm)	540x215x450
N.W.(kg)	5.7
G.W.(kg)	6.5
40'HQ(pcs)	1280

Function

- 1 hours timing
- 3 speed control
- 5 blade
- Swing left and right



FD40-A39



Specification

Power(W)	60
Packing size(mm)	540x215x450
N.W.(kg)	5.7
G.W.(kg)	6.5
40'HQ(pcs)	1280

Function

- 1 hours timing
- 3 speed control
- 5 blade
- Swing left and right

16" Stand fan(400mm)



FD40-A38



Specification

Power(W)	60
Packing size(mm)	540x215x450
N.W.(kg)	5.7
G.W.(kg)	6.5
40'HQ(pcs)	1280

Function

- 1 hours timing
- 3 speed control
- 5 blade
- Swing left and right



FD40-A36



Specification

Power(W)	60
Packing size(mm)	495x215x450
N.W.(kg)	5.2
G.W.(kg)	6.0
40'HQ(pcs)	1375

Function

- 1 hours timing
- 3 speed control
- 5 blade
- Swing left and right



FD40-A34E



Specification

Power(W)	60
Packing size(mm)	540x215x450
N.W.(kg)	5.7
G.W.(kg)	6.5
40'HQ(pcs)	1280

Function

- 1 hours timing
- 3 speed control
- 5 blade
- Swing left and right

16" Stand fan(400mm)



FD40-A34



Specification

Power(W)	60
Packing size(mm)	540x215x450
N.W.(kg)	5.7
G.W.(kg)	6.5
40'HQ(pcs)	1280

Function

- 1 hours timing
- 3 speed control
- 5 blade
- Swing left and right



FD40-A33



Specification

Power(W)	60
Packing size(mm)	495x215x450
N.W.(kg)	5.3
G.W.(kg)	6.1
40'HQ(pcs)	1375

Function

- 1 hours timing
- 3 speed control
- 5 blade
- Swing left and right



FD40-A32



Specification

Power(W)	60
Packing size(mm)	540x215x450
N.W.(kg)	5.7
G.W.(kg)	6.5
40'HQ(pcs)	1280

Function

- 1 hours timing
- 3 speed control
- 5 blade
- Swing left and right

16" Stand fan(400mm)



FD40-A31



Specification

Power(W)	60
Packing size(mm)	475x215x450
N.W.(kg)	5.5
G.W.(kg)	6.3
40'HQ(pcs)	1460

Function

- 1 hours timing
- 3 speed control
- 5 blade
- Swing left and right



FD40-A30



Specification

Power(W)	60
Packing size(mm)	455x215x450
N.W.(kg)	4.9
G.W.(kg)	5.5
40'HQ(pcs)	1550

Function

- 1 hours timing
- 3 speed control
- 5 blade
- Swing left and right



FD35-A5



Specification

Power(W)	45
Packing size(mm)	615x195x420
N.W.(kg)	4.4
G.W.(kg)	5.8
40'HQ(pcs)	1254

Function

- Table or stand style
- 3 wind speed: HI,MID,LOW
- Swing left and right

2 in 1 FAN

16" Wall fan(400mm)



FB40-A17



Specification

Power(W)	60
Packing size(mm)	450x205x450
N.W.(kg)	2.8
G.W.(kg)	3.2
40'HQ(pcs)	1650

Function

- 3 speed control
- 5 blade
- Swing left and right



FB40-A17R



Specification

Power(W)	60
Packing size(mm)	450x205x450
N.W.(kg)	2.8
G.W.(kg)	3.2
40'HQ(pcs)	1650

Function

- With remote control
- 0.5-7.5 hours timing
- 3 speed control
- 5 blade
- Swing left and right



FB40-A18



Specification

Power(W)	60
Packing size(mm)	450x205x450
N.W.(kg)	2.7
G.W.(kg)	3.1
40'HQ(pcs)	1650

Function

- 3 speed control
- 5 blade
- Swing left and right



FB40-A18R



Specification

Power(W)	60
Packing size(mm)	450x205x450
N.W.(kg)	2.7
G.W.(kg)	3.1
40'HQ(pcs)	1650

Function

- With remote control
- 0.5-7.5 hours timing
- 3 speed control
- 5 blade
- Swing left and right

16" Wall fan(400mm)

FB40-A20




Specification

Power(W)	60
Packing size(mm)	450x205x450
N.W.(kg)	2.5
G.W.(kg)	3.1
40'HQ(pcs)	1650

Function

- 3 speed control
- 5 blade
- Swing left and right

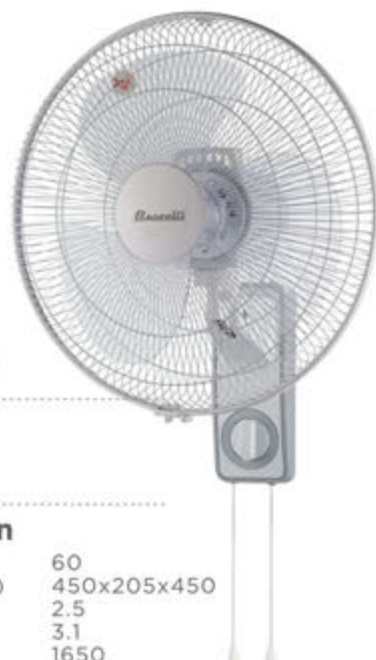

FB40-A20R



Specification

Power(W)	60
Packing size(mm)	450x205x450
N.W.(kg)	2.5
G.W.(kg)	3.1
40'HQ(pcs)	1650

Function

- With remote control
- 0.5-7.5 hours timing
- 3 speed control
- 5 blade
- Swing left and right



Box fan

FB40-A19



Specification

Power(W)	60
Packing size(mm)	450x205x450
N.W.(kg)	2.7
G.W.(kg)	3.1
40'HQ(pcs)	1650

Function

- 3 speed control
- 5 blade
- Swing left and right



FYT30-B1(12")



Specification

Power(W)	50
Carton box size(mm)	660x405x455
Packing size(mm)	395x160x445
N.W.(kg)	2.2
G.W.(kg)	2.5
40'HQ(pcs)	2160

Function

- 1 hours timing
- 3 speed control
- 5 blade



Tower fan

TF-1701(H:87cm/34inch)



Specification

Power(W)	40
Packing size(mm)	910x215x190
N.W.(kg)	3.1
G.W.(kg)	3.9
40'HQ(pcs)	1848

Function

- 3 speed control
- Low noise and energy-saving
- Tower fan with oscillation function



TF-1702(H:107cm/42inch)



Specification

Power(W)	40
Packing size(mm)	1140x215x190
N.W.(kg)	3.4
G.W.(kg)	4.3
40'HQ(pcs)	1400

Function

- 3 speed control
- Low noise and energy-saving
- Tower fan with oscillation function



TF-1701R(H:87cm/34inch)



Specification

Power(W)	40
Packing size(mm)	910x215x190
N.W.(kg)	3.1
G.W.(kg)	3.9
40'HQ(pcs)	1848

Function

- With remote control
- 0.5-7.5 hours timing 3 speed control
- Low noise and energy-saving
- Tower fan with oscillation function



TF-1702R(H:107cm/42inch)



Specification


Power(W)	40
Packing size(mm)	1140x215x190
N.W.(kg)	3.4
G.W.(kg)	4.3
40'HQ(pcs)	1400

Function

- With remote control
- 0.5-7.5 hours timing
- 3 speed control
- Low noise and energy-saving
- Tower fan with oscillation function



Tower fan

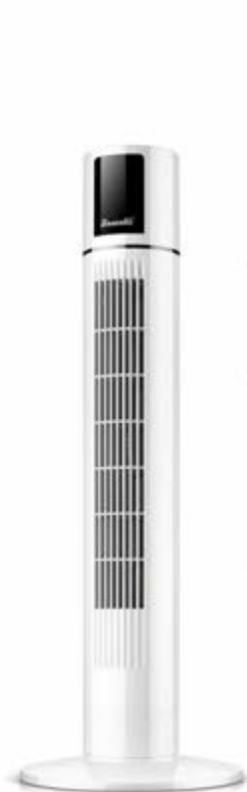

TF-1818(H:87cm/34inch)



Specification

Power(W)	40
Packing size(mm)	910x215x190
N.W.(kg)	3.1
G.W.(kg)	3.9
40'HQ(pcs)	1848

Function

- 3 speed control
- Low noise and energy-saving
- Tower fan with oscillation function



TF-1828(H:107cm/42inch)



Specification

Power(W)	40
Packing size(mm)	1140x215x190
N.W.(kg)	3.4
G.W.(kg)	4.3
40'HQ(pcs)	1440

Function

- 3 speed control
- Low noise and energy-saving
- Tower fan with oscillation function



TF-1818R(H:87cm/34inch)



Specification

Power(W)	40
Packing size(mm)	910x215x190
N.W.(kg)	3.1
G.W.(kg)	3.9
40'HQ(pcs)	1848

Function

- With remote control
- 1-8 hours timing
- 3 speed control
- Low noise and energy-saving
- Tower fan with oscillation function



TF-1828R(H:107cm/42inch)



Specification

Power(W)	40
Packing size(mm)	1140x215x190
N.W.(kg)	3.4
G.W.(kg)	4.3
40'HQ(pcs)	1440

Function

- With remote control
- 1-8hours timing
- 3 speed control
- Low noise and energy-saving
- Tower fan with oscillation function

Long strip heater



ND20-21



Specification

Power(W)	1100/2200
Product size(mm)	1223x148x220
Packing size(mm)	1270x200x268
N.W.(kg)	5.4
G.W.(kg)	6.6
40'HQ(pcs)	990

Function

- Aluminum Heating
- Overheat protection,with handle



ND20-21R



Specification

Power(W)	1100/2200
Product size(mm)	1223x148x220
Packing size(mm)	1270x200x268
N.W.(kg)	5.6
G.W.(kg)	6.8
40'HQ(pcs)	990

Function

- Aluminum Heating
- With remote control
- 0-12 hours timing
- Ultrasonic atomizing humidification
- Overheat protection,with handle



ND20-22



Specification

Power(W)	1100/2200
Product size(mm)	1240x180x270
Packing size(mm)	1250x190x285
N.W.(kg)	5.4
G.W.(kg)	6.6
40'HQ(pcs)	972

Function

- Aluminum Heating
- Overheat protection,with handle



ND20-22R



Specification

Power(W)	1100/2200
Product size(mm)	1240x180x270
Packing size(mm)	1250x190x285
N.W.(kg)	5.6
G.W.(kg)	6.8
40'HQ(pcs)	972

Function

- Aluminum Heating
- With remote control
- 0-12 hours timing
- Ultrasonic atomizing humidification
- Overheat protection,with handle

PTC heater



QG20-T2



Specification

Power(W)	1000/2000
Product size(mm)	215x215x600
Packing size(mm)	645x265x280
N.W.(kg)	2.4
G.W.(kg)	3.2
40'HQ(pcs)	1440

Function

- PTC heating
- Overheat protection
- Wind angle oscillation
- Safety tip-over switch



QG20-T2R



Specification

Power(W)	1000/2000
Product size(mm)	215x215x600
Packing size(mm)	645x265x280
N.W.(kg)	2.4
G.W.(kg)	3.2
40'HQ(pcs)	1440

Function

- PTC heating, LED light
- With remote control
- 0.5-7.5 hours timing
- Overheat protection
- Wind angle oscillation
- Safety tip-over switch



QG20-T3



Specification

Power(W)	1000/2000
Product size(mm)	210x210x660
Packing size(mm)	695x265x275
N.W.(kg)	2.3
G.W.(kg)	3.1
40'HQ(pcs)	1335

Function

- PTC heating
- Overheat protection, with handle
- Wind angle oscillation
- Safety tip-over switch



QG20-T3R



Specification

Power(W)	1000/2000
Product size(mm)	210x210x660
Packing size(mm)	695x265x275
N.W.(kg)	2.3
G.W.(kg)	3.1
40'HQ(pcs)	1335

Function

- PTC heating, LED light
- With remote control
- 0.5-8 hours timing
- Overheat protection, with handle
- Wind angle oscillation
- Safety tip-over switch

PTC heater



QG20-T8(H:87cm)



Specification

Power(W)	1000/2000
Product size(mm)	315x315x870
Packing size(mm)	910x215x190
N.W.(kg)	2.4
G.W.(kg)	3.2
40'HQ(pcs)	1680

Function

- PTC heating
- Overheat protection, with handle
- Wind angle oscillation
- Safety tip-over switch

QG20-B3



Specification

Power(W)	1000/2000
Packing size(mm)	605x170x240
Carton box size(mm)	625x355x495
N.W.(kg)	2.2
G.W.(kg)	3.1
40'HQ(pcs)	1280

Function

- Three seconds is hot
- In the bath and room PTC heater



QG20-B3R



Specification

Power(W)	1000/2000
Packing size(mm)	605x170x240
Carton box size(mm)	625x355x495
N.W.(kg)	2.3
G.W.(kg)	3.2
40'HQ(pcs)	1280

Function

- With remote control
- 0.5-7.5 hours timing
- Three seconds is hot
- In the bath and room PTC heater



PTC heater


QG20-T13
Specification

Power(W)	1000
Packing size(mm)	205x200x210
Carton box size(mm)	435x420x450
N.W.(kg)	0.7
G.W.(kg)	1.0
40'HQ(pcs)	6640

Function

- PTC heating
- Over heat protection


QG20-T14
Specification

Power(W)	1000
Packing size(mm)	200x170x215
Carton box size(mm)	420x355x460
N.W.(kg)	0.8
G.W.(kg)	1.1
40'HQ(pcs)	7488

Function

- PTC heating
- Over heat protection


QG20-T15
Specification

Power(W)	900/1500
Packing size(mm)	262x260x340
Carton box size(mm)	540x530x355
N.W.(kg)	1.9
G.W.(kg)	2.4
40'HQ(pcs)	2352

Function

- PTC heating
- Overheat protection
- Wind angle oscillation
- Safety tip-over switch


QG20-T17
Specification

Power(W)	900/1500
Packing size(mm)	270x270x365
Carton box size(mm)	555x550x380
N.W.(kg)	1.9
G.W.(kg)	2.6
40'HQ(pcs)	2016

Function

- PTC heating
- Overheat protection
- Wind angle oscillation
- Safety tip-over switch

PTC heater


QG20-T7

Specification

Power(W)	900/1500
Packing size(mm)	240x235x350
Carton box size(mm)	500x490x365
N.W.(kg)	1.9
G.W.(kg)	2.4
40'HQ(pcs)	3068

Function

- PTC heating
- Overheat protection
- Wind angle oscillation
- Safety tip-over switch


QG20-T9

Specification

Power(W)	900/1500
Packing size(mm)	240x235x395
Carton box size(mm)	500x490x415
N.W.(kg)	2.0
G.W.(kg)	2.5
40'HQ(pcs)	2576

Function

- PTC heating
- Overheat protection
- Wind angle oscillation
- Safety tip-over switch


QG20-T11

Specification

Power(W)	900/1500
Packing size(mm)	255x250x320
Carton box size(mm)	530x510x335
N.W.(kg)	1.6
G.W.(kg)	2.1
40'HQ(pcs)	2548

Function

- PTC heating
- Overheat protection
- Wind angle oscillation
- Safety tip-over switch


QG20-T11R

Specification

Power(W)	900/1500
Packing size(mm)	255x250x320
Carton box size(mm)	530x510x335
N.W.(kg)	1.7
G.W.(kg)	2.2
40'HQ(pcs)	2548

Function

- PTC heating
- With remote control
- 0.5-7.5 hours timing
- Overheat protection
- Wind angle oscillation
- Safety tip-over switch

Ceramic heater


FG20-D3

Specification

Power(W)	1000/2000
Packing size(mm)	345x345x555
N.W.(kg)	2.8
G.W.(kg)	3.8
40'HQ(pcs)	958

Function

- Ceramic heating element
- 360° heating
- Safety tip-over switch


FG20-D5

Specification

Power(W)	1000/2000
Packing size(mm)	280x280x620
N.W.(kg)	2.8
G.W.(kg)	3.8
40'HQ(pcs)	1340

Function

- Ceramic heating element
- 3 hours timing
- 360° heating
- Safety tip-over switch


FG20-D8

Specification

Power(W)	1000/2000
Packing size(mm)	295x295x475
N.W.(kg)	2.9
G.W.(kg)	3.8
40'HQ(pcs)	1400

Function

- Ceramic heating element
- 360° heating
- Safety tip-over switch


FG20-D10

Specification

Power(W)	1000/2000
Packing size(mm)	280x280x620
N.W.(kg)	2.8
G.W.(kg)	3.6
40'HQ(pcs)	1340

Function

- Ceramic heating element
- 360° heating
- Safety tip-over switch

Carbon heater


FG20-D3-T

Specification

Power(W)	900/1800
Packing size(mm)	345x345x555
N.W.(kg)	2.8
G.W.(kg)	3.8
40'HQ(pcs)	958

Function

- Carbon tube heating element
- 360° heating
- Safety tip-over switch


FG20-D8-T

Specification

Power(W)	900/1800
Packing size(mm)	295x295x475
N.W.(kg)	2.9
G.W.(kg)	3.8
40'HQ(pcs)	1400

Function

- Carbon tube heating element
- 360° heating
- Safety tip-over switch


FG20-D5-T

Specification

Power(W)	900/1800
Packing size(mm)	280x280x620
N.W.(kg)	2.8
G.W.(kg)	3.8
40'HQ(pcs)	1340

Function

- Carbon tube heating element
- 3 hours timing
- 360° heating
- Safety tip-over switch

Convactor heater



ND20-16D



Specification

Power(W)	1600
Packing size(mm)	645x150x490
N.W.(kg)	3.5
G.W.(kg)	4.9
40'HQ(pcs)	1340

Function

- 2 heat settings
- Over-heat protection
- Drying and humidifier function



ND20-20G



Specification

Power(W)	2000
Packing size(mm)	805x155x520
N.W.(kg)	3.8
G.W.(kg)	5.2
40'HQ(pcs)	1010

Function

- 2 heat settings
- Over-heat protection
- Drying and humidifier function

Sun heater



FG9-A34(14")



Specification

Power(W)	1200
Head diameter(mm)	Ø410
Packing size(mm)	635x365x420
N.W.(kg)	6.0
G.W.(kg)	7.5
40'HQ(pcs)	660

Function

- 3 hours timing
- Safety switch



FG9-A32(14")



Specification

Ceramic heater(W)	1000
Halogen heater(W)	1200
Head diameter(mm)	Ø410
Packing size(mm)	635x365x420
N.W.(kg)	6.0
G.W.(kg)	7.5
40'HQ(pcs)	660

Function

- 3 hours timing
- Safety switch



FG9-A37(14")



Specification

Ceramic heater(W)	950
Halogen heater(W)	800
Head diameter(mm)	Ø410
Packing size(mm)	500x365x355
N.W.(kg)	2.9
G.W.(kg)	4.5
40'HQ(pcs)	1008

Function

- 3 hours timing
- Safety switch



FG9-A33(14'')

**Specification**

Ceramic heater(W)	950
Halogen heater(W)	800
Head diameter(mm)	Ø410
Packing size(mm)	500x365x355
N.W.(kg)	3.0
G.W.(kg)	4.5
40'HQ(pcs)	1008

Function

- 3 hours timing
- Safety switch



FG9-A23(14'')

**Specification**

Ceramic heater(W)	950
Halogen heater(W)	800
Head diameter(mm)	Ø410
Packing size(mm)	500x365x355
N.W.(kg)	3.0
G.W.(kg)	4.5
40'HQ(pcs)	1008

Function

- 3 hours timing
- Safety switch



FG9-A9(14'')

**Specification**

Ceramic heater(W)	950
Halogen heater(W)	800
Head diameter(mm)	Ø410
Packing size(mm)	500x365x355
N.W.(kg)	2.9
G.W.(kg)	4.5
40'HQ(pcs)	1008

Function

- 3 hours timing
- Safety switch



FG9-A18(12'')

**Specification**

Ceramic heater(W)	950
Halogen heater(W)	800
Head diameter(mm)	Ø370
Packing size(mm)	460x350x330
N.W.(kg)	2.4
G.W.(kg)	3.6
40'HQ(pcs)	1280

Function

- 2 hours timing
- Safety switch



FG9-A8(12'')

**Specification**

Ceramic heater(W)	950
Halogen heater(W)	800
Head diameter(mm)	Ø370
Packing size(mm)	460x350x330
N.W.(kg)	2.4
G.W.(kg)	3.6
40'HQ(pcs)	1280

Function

- 2 hours timing
- Safety switch



FG9-T7(10'')

**Specification**

Ceramic heater(W)	700
Halogen heater(W)	700
Head diameter(mm)	Ø300
Packing size(mm)	350x190x310
N.W.(kg)	1.4
G.W.(kg)	1.7
40'HQ(pcs)	2940



FG9-A18(14'')

**Specification**

Ceramic heater(W)	950
Halogen heater(W)	800
Head diameter(mm)	Ø370
Packing size(mm)	530x375x355
N.W.(kg)	2.4
G.W.(kg)	3.6
40'HQ(pcs)	923

Sun heater



FG9-A20(14")



Specification

Ceramic heater(W)	950
Halogen heater(W)	800
Head diameter(mm)	Ø370
Packing size(mm)	530x325x355
N.W.(kg)	2.4
G.W.(kg)	3.6
40'HQ(pcs)	923



FG9-A19(14")



Specification

Ceramic heater(W)	950
Halogen heater(W)	800
Head diameter(mm)	Ø370
Packing size(mm)	530x375x355
N.W.(kg)	2.4
G.W.(kg)	3.6
40'HQ(pcs)	923

Heater



FG12-B18



Specification

Power(W)	1200
Packing size(mm)	645x135x420
N.W.(kg)	4.3
G.W.(kg)	5.3
40'HQ(pcs)	1830

Function

- Carbon tube heating element
- 2 heat settings
- Over-heat protection



FG12-C10



Specification

Power(W)	1200
Packing size(mm)	645x135x420
N.W.(kg)	4.3
G.W.(kg)	5.3
40'HQ(pcs)	1830

Function

- Quartz tube heating element
- 3 heat settings
- Over-heat protection

Quartz heater



FG12-B11



Specification

Power(W)	1200
Packing size(mm)	315X160X580
N.W.(kg)	2.7
G.W.(kg)	3.3
40'HQ(pcs)	2360

Function

- Quartz tube heating element
- 3 heat settings
- Over-heat protection



FG9-C1



Specification

Power(W)	800
Packing size(mm)	320x130x390
N.W.(kg)	1.1
G.W.(kg)	1.5
40'HQ(pcs)	3860

Function

- Quartz tube heating element
- 2 heat settings
- Over-heat protection



FG9-C9



Specification

Power(W)	800
Packing size(mm)	315x105x420
N.W.(kg)	1.1
G.W.(kg)	1.4
40'HQ(pcs)	4320

Function

- Quartz tube heating element
- 2 heat settings
- Over-heat protection

Compact Laundry Dryer

4.0kg



GDZ40-188G



Specification

Product size(mm)	480x400x560
Packing size(mm)	536x465x595
N.W.(kg)	14.5
G.W.(kg)	16.5
Dryer power:	850W
40'HQ(pcs)	440

Function

- Touch control panel
- 180Mins dry timer
- Adjustable tem from 0-60 degree .
- UV sterilization disinfection
- Intelligent drying
- PTC dryer

4.0kg



GDZ40-168E



Specification

Product size(mm)	480x400x560
Packing size(mm)	536x465x595
N.W.(kg)	14.5
G.W.(kg)	16.5
Dryer power:	850W
40'HQ(pcs)	440

Function

- Mechanical control panel
- 180Mins dry timer
- 80Mins Cold air care function
- PTC dryer

Mini Auto Washing Machine

3.0kg



XQB30-688G



Specification

Product size(mm)	345x395x610
Packing size(mm)	410x455x650
N.W.(kg)	13
G.W.(kg)	14.5
Washing power:	230W
High temp wash power:	1000W
Max Water level:	13
40'HQ(pcs)	580

Function

- 60-80 degree high temp wash
- High power air drying function
- Stainless steel inner tub and impeller
- 24delay hours start, Auto shut off
- 10 Wash program options
- Child lock
- 6 Water level options

3.0kg



XQB30-668L



Specification

Product size(mm)	345x395x610
Packing size(mm)	410x455x650
N.W.(kg)	13
G.W.(kg)	14.5
Washing/Spinning power:	230
Max Water level:	13
40'HQ(pcs)	580

Function

- Blue light sterilization
- High power air drying function
- Stainless steel inner tub and plastic impeller
- 24delay hours start, Auto shut off
- 10 Wash program options
- Child lock
- 6 Water level options

Auto Washing Machine

3.0kg



XPB30-2020



Specification

Product size(mm)	320x320x370
Packing size(mm)	370x360x520
N.W.(kg)	3.8
G.W.(kg)	4.5
Washing/Spinning power:	240W
Max Water level:	13
40'HQ(pcs)	990

Function

- Blue light sterilization
- 10 MIN Quick wash
- De privation function
- Plastic interior tub and washing wheel

5.0kg



XPB50-2001



Specification

Product size(mm)	390x390x520
Packing size(mm)	430x430x670
N.W.(kg)	6
G.W.(kg)	7
Washing/Spinning power:	260W
Max Water level:	38
40'HQ(pcs)	540

Function

- Blue light sterilization
- 10 MIN Quick wash
- De privation function
- Plastic interior tub and washing wheel

Auto Washing Machine

5.2kg



7.5kg



XQB52-168



Specification

Product size(mm)	445x450x785
Packing size(mm)	510x510x815
N.W.(kg)	18
G.W.(kg)	20
Washing power&Spin power:	380W/260W
Max Water level:	30.5
40'HQ(pcs)	276

Function

- 8 water level selections
- High power air drying function
- Stainless steel inner tub and plastic impeller
- 24delay hours start, Auto shut off
- 5 Wash program options
- Blue light
- Child lock

XQB75-A10



Specification

Product size(mm)	535x540x910
Packing size(mm)	560x560x925
N.W.(kg)	25
G.W.(kg)	27
Washing power&Spin power:	380W/260W
Max Water level:	46
40'HQ(pcs)	208

Function

- 4 water level selections
- High power air drying function
- Stainless steel inner tub and plastic impeller
- 24delay hours start, Auto shut off
- 5 Wash program options
- Blue light
- Child lock

Auto Washing Machine

9.0kg



XQB90-1916



Specification

Product size(mm)	540x545x930
Packing size(mm)	590x590x970
N.W.(kg)	32
G.W.(kg)	34
Washing power&Spin power:	480W/ 360W
Max Water level:	53
40'HQ(pcs)	200

Function

- 8 water level selections
- High power air drying function
- Stainless steel inner tub and plastic impeller
- 24delay hours start, Auto shut off
- 5 Wash program options
- Blue light
- Child lock